





MICRO POWER
SELF-CONTAINED EMERGENCY EXIT SIGN
 SERIES : SLM-PL



BATTERY
ISO 9002

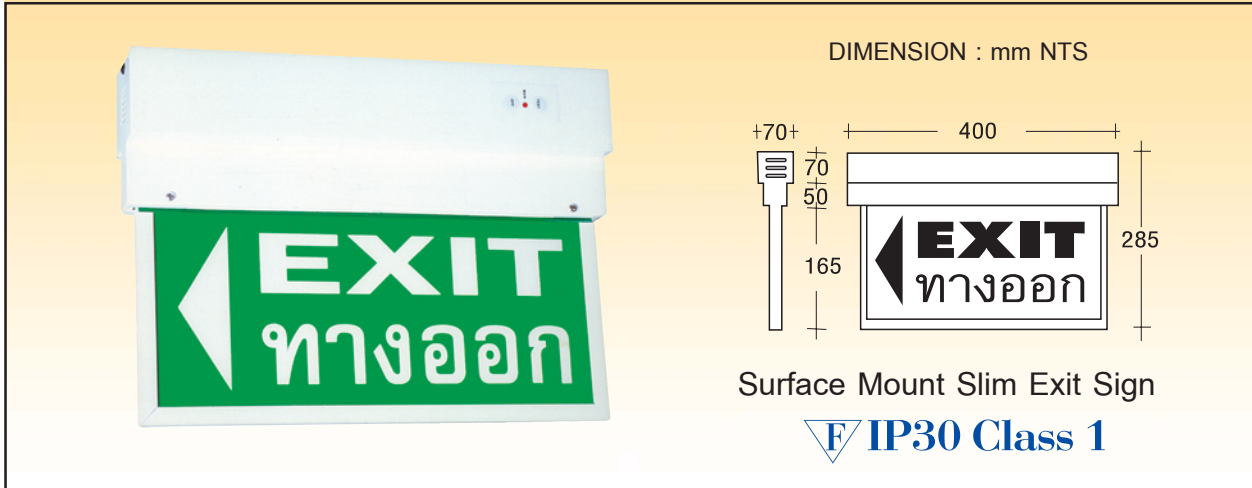

This Elegant Slim Exit Sign is designed with a gear tray that is removable and is independent of the housing to facilitate ease of installation, maintenance, and replacement of lamps. It also functions as a reflector to increase light output and homogeneous light distribution.

SPECIFICATIONS

MODE OF OPERATION	:	<input type="checkbox"/> MAINTAINED
LAMP	:	<input type="checkbox"/> 1 X 11W.PL 4PIN LAMP
RATE DURATION	:	2 HRS & OTHERS
MAIN SUPPLY	:	220 VOLT, 50Hz & OTHERS
POWER CONSUMPTION	:	4VA / 13VA
BATTERY	:	HIGH TEMP NICKLE CADMIUM
CHARGER	:	AUTOMATIC CONSTANT CURRENT
CHARGER MONITOR	:	RED L.E.D. Ø 5mm.
TEST FACILITY	:	MICRO SWITCH
SAFETY FEATURE	:	LOW VOLT CUT-OFF PREVENTING BATTERY OVER DISCHARGE
FITTING CONSTRUCTION	:	ELECTRO GALVANISED STEEL WITH EPOXY POWDER COATING
DIFFUSER	:	FIRE RETARDANT MOULDED ACRYLIC
LEGEND	:	ISO GREEN, OTHER LEGEND OPTIONAL
MOUNTING	:	WALL OR CEILING
CABLE ENTRY	:	Ø 20mm. K/O HOLE
COMPLIANCE	:	IEC 598-2-22

MODEL	BATTERY	LAMP (WATT)	SIDE	DURATION	WEIGHT (GROSS)
SLM S1FL10N	NI-CD HI-TEMP 2.4V4.0Ah	FLUORESCENT 1 X 10W.	SINGLE	2 HOURS	3.0 KG.
SLM D1FL10N	NI-CD HI-TEMP 2.4V4.0Ah	FLUORESCENT 1 X 10W.	DOUBLE	2 HOURS	3.0 KG.