




MICRO POWER
SELF-CONTAINED EMERGENCY EXIT SIGN
 SERIES : SLR-PL



BATTERY
ISO 9002

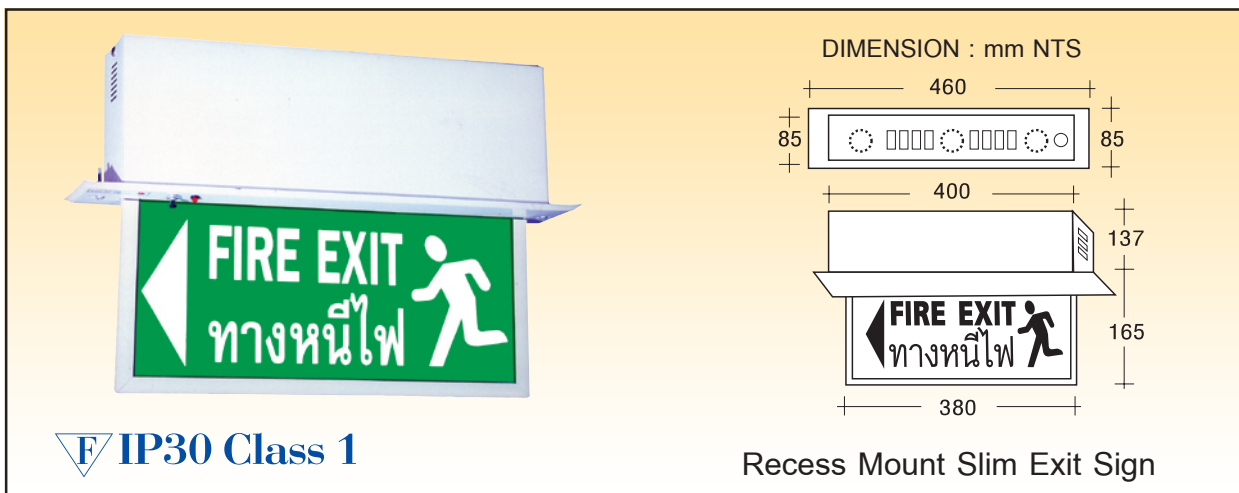

This Recess-Mounted Exit Sign is designed with the control gear being mounted behind the ceiling. Only an elegant slim plate with the printed legend is visible. The gear tray is removable and is independent of the housing to facilitate ease installation, maintenance and replacement of lamps. It also function as a reflector to increase light output and homogenous light distribution.

SPECIFICATIONS

| | | |
|----------------------|---|---|
| MODE OF OPERATION | : | <input type="checkbox"/> MAINTAINED |
| LAMP | : | <input type="checkbox"/> 1 X 11W. PL 4PIN LAMP |
| RATE DURATION | : | 2 HRS & OTHERS |
| MAIN SUPPLY | : | 220 VOLT, 50Hz & OTHERS |
| POWER CONSUMPTION | : | 4VA / 13VA |
| BATTERY | : | HIGH TEMP NICKLE CADMIUM |
| CHARGER | : | AUTOMATIC CONSTANT CURRENT |
| CHARGER MONITOR | : | RED L.E.D. Ø 5mm. |
| TEST FACILITY | : | MICRO SWITCH |
| SAFETY FEATURE | : | LOW VOLT CUT-OFF PREVENTING BATTERY OVER DISCHARGE |
| FITTING CONSTRUCTION | : | ELECTRO GALVANISED STEEL WITH EPOXY POWDER COATING |
| DIFFUSER | : | FIRE RETARDANT ACRYLIC |
| LEGEND | : | ISO GREEN, OTHER LEGEND OPTIONAL |
| MOUNTING | : | RECESS MOUNTED |
| CABLE ENTRY | : | Ø 20mm. K/O HOLE |
| COMPLIANCE | : | IEC 598-2-22 |

| MODEL | BATTERY | LAMP (WATT) | SIDE | DURATION | WEIGHT (GROSS) |
|-------------|----------------------------|-------------------------|--------|----------|----------------|
| SLR S1FL10N | NI-CD HI-TEMP 2.4V4.0Ah | FLUORESCENT 1 X 10W. | SINGLE | 2 HOURS | 3.0 KG. |
| SLR D1FL10N | NI-CD HI-TEMP 2.4V4.0Ah | FLUORESCENT 1 X 10W. | DOUBLE | 2 HOURS | 3.0 KG. |