




**MICRO POWER**  
**SELF-CONTAINED EMERGENCY EXIT SIGN**  
 SERIES : ELS-PL



**BATTERY**  
**ISO 9002**

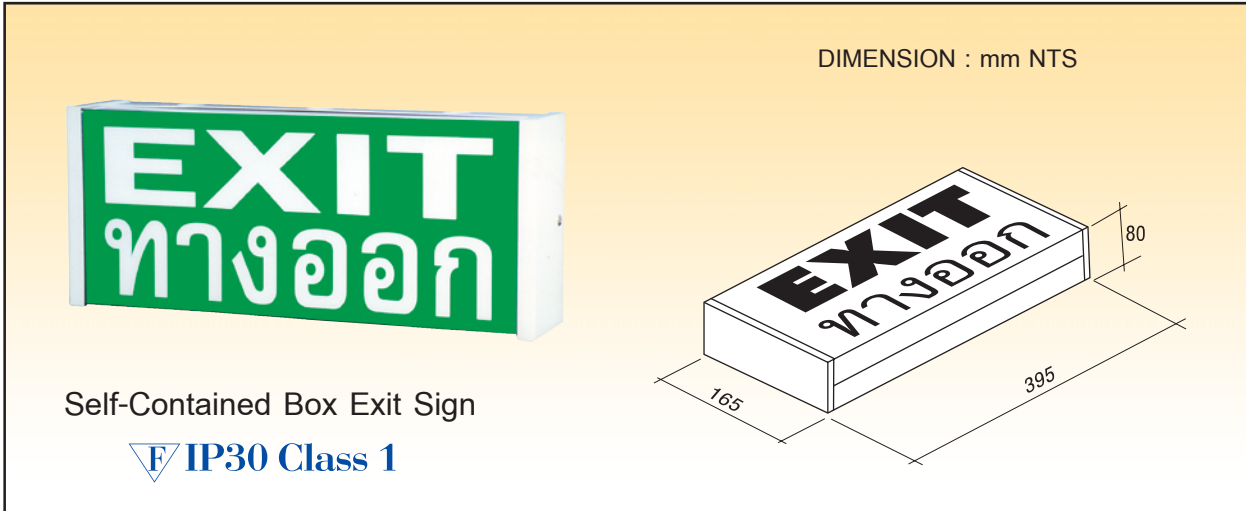

The gear tray that is removable and is independent of the housing to facilitate ease of installation, maintenance and replacement of lamps. It also functions as a reflector to increase light output and Homogenous Light Distribution.

## SPECIFICATIONS

MODE OF OPERATION	:	<input type="checkbox"/> MAINTAINED	<input type="checkbox"/> SUSTAINED
LAMP	:	<input type="checkbox"/> 1 X 11W.	<input type="checkbox"/> 2 X 11W. PL 4PIN LAMP
RATE DURATION	:	2 HRS & OTHERS	
MAIN SUPPLY	:	220 VOLT, 50Hz & OTHERS	
POWER CONSUMPTION	:	4VA / 13VA	
BATTERY	:	HIGH TEMP NICKLE CADMIUM	
CHARGER	:	AUTOMATIC CONSTANT CURRENT	
CHARGER MONITOR	:	RED L.E.D. Ø 5mm.	
TEST FACILITY	:	MICRO SWITCH	
SAFETY FEATURE	:	LOW VOLT CUT-OFF PREVENTING BATTERY OVER DISCHARGE	
FITTING CONSTRUCTION	:	ELECTRO GALVANISED STEEL WITH EPOXY POWDER COATING	
DIFFUSER	:	FIRE RETARDANT MOULDED ACRYLIC	
LEGEND	:	ISO GREEN, OTHER LEGEND OPTIONAL	
MOUNTING	:	WALL OR CEILING	
CABLE ENTRY	:	Ø 20mm. K/O HOLE	
COMPLIANCE	:	ICE 598-2-22	

MODEL	BATTERY	LAMP (WATT)	SIDE	DURATION	WEIGHT (GROSS)
ELS 1FL10	NI-CD HI-TEMP 2.4V4.0Ah	FLUORESCENT 1 X 10W.	SINGLE	2 HOURS	3.0 KG.